


# TECTIQ Transponder card MIFARE DESFire EV3 8K (Security UID)

Art.-Nr. TTTK10108

Seite 1 von 1

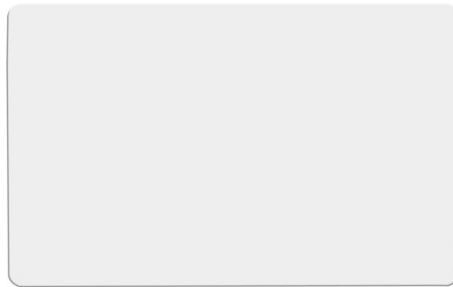

## Technical data - TECTIQ Transponder card MIFARE DESFire EV3 8K (Security UID)

Area of application	Locking media for ABUS TECTIQ access control system with static UID
Colour	white
Design	Card
Dimensions	86 x 54 x 1 mm
Item abbreviation	K-MIF-DES-8K-SEC-UID
Material	plastic
Max. operating temperature	50 °C
Min. operating temperature	-20 °C
Programming technology	RFID (13,56 MHz)
RFID conformity	ISO 14443
RFID frequency	13,56 MHz
RFID technology	MIFARE® DESFire® EV3
Reader type	MIFARE® DESFire® 8K EV3 (70pf)
Security features	Copy and read protection with MIFARE® DESFire® + ABUS security application with static UID
Transponder conformity	Passive transponder ISO 14443 A (MIFARE® DESFire®)
Transponder encryption	AES 128-Bit
Transponder programming	Access control software and card reader